



Excavator SWE 25FU

Operating Weight	2.65t(rubber track)
Engine Power	14kW/2200rpm
Engine Brand	YANMAR
Standard Bucket Capacity	0.08m ³
Max. Digging Depth	2.84m



Excavator SWE25FU

Parameter

ENGINE

Brand	YANMAR
Model	3TNV80F
Type	3-cylinder 4-stroke water cooled
Displacement	1.267L
Power	14kW/2400rpm

DIMENSIONS

Counterweight Clearance	525mm
Tail Swing Radius	765mm
Shipping Length	4140mm
Shipping Width	1500mm
Shipping Height	2455mm

ELECTRIC SYSTEM

Nominal Voltage	12V
Batteries	63Ah
Alternator	12V-40A
Starter	12V-1.7kW

DRIVE

Max.Travel Speed (2nd/1st)	4.1/2.3km/h
Gradeability	30°
Max. Traction	30.7kN

WORKING RANGES

Max. Cutting Height	4355mm
Max. Loading Height	3010mm
Max. Digging Depth	2840mm
Max. Vertical Wall Digging Depth	2580mm
Max. Digging Reach	4775mm
Max. Reach at Ground Level	4670mm
Bucket Digging Force	24kN
Stick Digging Force	12kN
Ground Pressure	25.1kPa
Swing Speed	8.8rpm

UNDERCARRIAGE

Undercarriage Width	1500mm
Shoe Width	300mm
Length to Center of Rollers	1560mm
Track Length	1990mm
Track Height	475mm

CAPACITY

Fuel Tank	26L
Hydraulic Tank	24L

BULLDOZING BOARD

independent moving, controlled by the gear shift lever	
Length X Width	1500X340mm
Max. Lifting Height	280mm
Max. Cutting Depth	320mm


HYDRAULIC SYSTEM

Main Pumps	
Type	2 variable displacement pumps, 1 gear pump
Displacement	2x29+19.2+6.5 L/min
Working Pressure	2x21.5+18 MPa

Excavator

SWE 25FU

Working Ranges

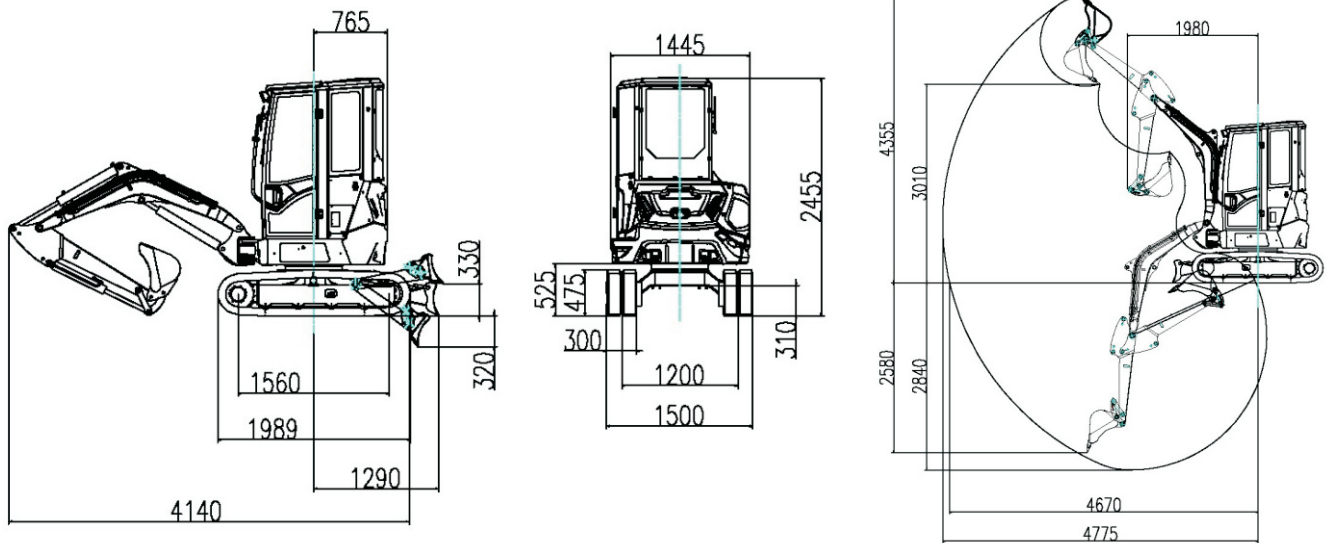

Load Capacity

A(m) B(m)	MAX		3.5m		3.0m		2.5m		2.0m	
	Front(kg)	Side(kg)	Front(kg)	Side(kg)	Front(kg)	Side(kg)	Front(kg)	Side(kg)	Front(kg)	Side(kg)
3.0	469.00*	404.30	—	—	469.00*	404.30	—	—	—	—
2.5	497.70*	350.70	—	—	512.10*	424.90	—	—	—	—
2.0	536.00*	313.50	550.40*	445.60	536.00*	424.90	670.00*	515.70	—	—
1.5	540.80*	288.80	564.70*	440.10	612.60*	420.80	813.60*	528.10	—	—
1.0	555.10*	280.50	583.90*	429.10	703.50*	396.10	875.80*	503.30	—	—
0.5	574.30*	276.40	617.40*	407.10	703.50*	371.30	961.90*	470.30	—	—
0.0	612.60*	276.40	650.90*	396.10	813.60*	358.90	947.60*	449.70	1292.20*	598.20
-0.5	650.90*	309.40	—	—	756.10*	367.20	861.40*	474.40	1196.40*	577.60
-1.0	679.60*	363.10	—	—	679.60*	375.40	823.10*	466.20	1005.00*	573.50

Notes:

- 1) Load with * is limited by hydraulic capacity and based on ISO 10567. Rated loads do not exceed 87% of hydraulic capacity.
- 2) Load without * is limited by tipping load and based on ISO 10567. Rated loads do not exceed 75% of tipping load.

SUNWARD INTELLIGENT EQUIPMENT CO.,LTD.

Add: Sunward Intelligent Industrial Park, Xingsha, Changsha, 410100, China.

Tel: (0086-731) 83572 828 Fax: (0086-731) 83572 661

E-mail: international@sunward.com.cn

Web: www.sunward.com.cn

SUNWARD EUROPE HEAVY INDUSTRY NV

Add: Nijverheidspark 3, 3580 Beringen, Belgium

Tel: (0032-011) 434666

E-mail: eu@sunward.cc

